



SPC

Collection

www.madeleinefloors.com



Luxury Flooring



What is SPC !

- > SPC (Stone Plastic Composite) is an engineered luxury vin that combines limestone and stabilizers to create an extremely durable core. SPC flooring is up to the task in both residential and commercial settings.
- > SPC Wooden flooring is the very much popular option for floors in use today. The pattern enables a plethora of colours and grains to be displayed side by side
- > SPC flooring is very easy in installing as well. Any layment even can install the product. IT comes with unique Uniclick technology. This glueless locking technology for flooring works perfectly for both the long and short sides of the flooring panel. In addition to that, Uniclic is a locking system that is suitable for all types of materials starting from 3.2 mm.
- > SPC flooring is constructed in a way as Engineered wood that gives it greater stability and resistance to changes in temperature and humidity.
- > The Good part is that it looks like hardwood flooring because the top floor is real, but all the underneath is an SPC rigid core which makes the product more better for commercial and residential uses.



Layers of Rigid Core Luxury Vinyl Flooring are :

- 1 - UV Coating
- 2 - Wear Layer
- 3 - Decore Film
- 4 - Rigid SPC Core
- 5 - Attached Underlayment

SPC Core

- > SPC flooring contains a solid, waterproof core that won't ripple or swell no matter how much liquid you subject it to..
- > The core is ultra-dense with no foaming agents. You'll find it in traditional WPC flooring. It gives you slightly less softness underfoot, Although it makes the flooring extra durable and long lasting.





I am
Easy Installation.


Uniclic Technology



> Uniclic was the first one-piece locking profile to be introduced to the market. Over the years it became the industry's favorite locking technology thanks to its unmatched production efficiency and technical performance.





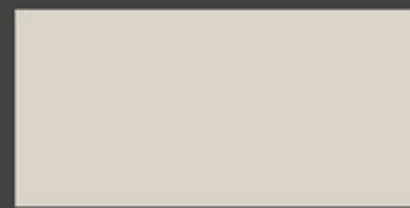




There are many advantages of uniclick locking system that makes the product more easy and simple to use.

1. Uniclic is fast and simple
2. it has to be installed by an angular rotation movement.
3. can also be installed in a horizontal way by snapping the planks into each other.
4. no unwanted gaps or spaces between floorboards.
5. no height differences and a seamless joint
6. Uniclic profiles interlock very securely.
7. Ensured Long- Lasting Stability



SPC Flooring Installation
















 <p>1. Adjust row so end cut is not less than 8". 2. Use shims to allow 3/8" expansion gap between the planks and the walls, or stationary interior room objects, so there is room for normal expansion and movement. 3. Starting from the LEFT with the tongue facing the wall, carefully place the first board in place.</p>	 <p>4. Align the next piece by overlapping the short end of the first board. Engage the short end at a 45° angle of the tongue and groove. The board must be flat to engage completely. Tap lightly into place by using a rubber mallet and tapping block to firmly lock short end. Continue in this manner until reaching the final plank in the first row.</p>	 <p>5. Cut the final board piece to length. 6. Begin the second row with the cut piece from the first row. If the cut piece is shorter than 8" (20cm), do not use it. Instead, begin with a new board to the left as necessary to align the edges of the end joint of the first row. Carefully push the board down until the tongue and groove lock together on the long side and ends.</p>
 <p>7. Position the first board of the second row in place by angling it up slightly, pushing forward and interlocking the long side of the tongue. Slide the board to the left as necessary to align the edges of the end joint of the first row. Carefully push the board down until the tongue and groove lock together on the long side and ends.</p>	 <p>8. Install second board of the second row (same as step 4 above). Slide close to the end joint without touching it. Ensure board lays flat.</p>	 <p>BRIDGE Attach a scrap piece of floor to bridge gap between ends of planks.</p>
 <p>9. Tap firmly but gently on end joint with a rubber mallet and tapping block to fully engage short end. Before moving on the next board, ensure the end joints are flush and tight.</p>	 <p>10. Install the remaining boards and rows in the same manner. 11. Cut the last board to size. If necessary, complete the tight fit by tapping the board into place with a pull bar. 12. Whenever practical, use cut pieces from previous rows as the starter board to reduce waste.</p>	 <p>>8in. 13. Maintain 8" spacing between end joints after the first rows for best appearance.</p>

How to install the SPC Flooring?

- > 1. Adjust row so end cut is not less than 8".
- > 2. Use shims to allow 3/8" expansion gap between the planks and the walls, or stationary interior room objects, so there is room for normal expansion and movement.
- > 3. Starting from the LEFT with the tongue facing the wall, carefully place the first board in place.
- > 4. Align the next piece by overlapping the short end of the first board, Engage the short end at a 45° angle of the tongue and groove. The board must be flat to engage completely. Tap lightly into place by using a rubber mallet and tapping block to firmly lock short end. Continue in this manner until reaching the final plank in the first row.
- > 5. Cut the final board piece to length.
- > 6. Begin the second row with the cutpiece from the first row. If the cut piece is shorter than 8" (20cm), do not use it. Instead, begin with a new board to the left as necessary to align the edges of the end joint of the first row. Carefully push the board down until the gongue and groove lock together on the long side and ends.
- > 7. Position the first board of the second row in place by engling it up slightly, pushing forward and interlocking the long side of the tongue. Slide the board to the left as necessary to align the edges of the end joint of the first row. Carefully push the board down until the tongue and groove lock together on the long side and ends.
- > 8. Install second board of the second row (same as step 4 above). Slide close to the end joint without touching it. Ensure board lays flat. Attach a scrap piece of floor to bridge gap between ends of planks.
- > 9. Tap firmly but gently on end joint with a rubber mallet and tapping block to fully engage short end. Before moving on the next board, ensure the end joints are flush and tight.
- > 10. Install the remaining boards and rows in the same container.
- > 11. Cut the last board to size. If necessary, complete the tight fit by tapping the board into place with a pull bar.
- > 12. Whenever practical, use cut pieces from previous rows as the starter board to reduce waste.
- > 13. Maintain 8" spacing between end joints after the first rows for best apperance.

Advantages of SPC Vinyl Tiles

						
100% Waterproof	Termite proof	Stain Resistant	Anti slip	Pet friendly	Ecological	Easy to clean
						
Quick & Easy to install	Superior scratch resistance	Fire Resistant	Easy logistics	Recyclable	Reduce noise	

collection



QSW-421



QSW-422



QSW-423



QSW-425



QSW-426



QSW-428



QSW-429



QSW-430



QSW-431



QSW-434



QSW-435



QSW-436



QSW-438



QSW-439



QSW-440



QSW-441



QSW-442



QSW-443



QSW-444



QSW-445



QSW-446



QSW-458



QSW-460



QSW-471



QSW-472



QSW-473

QSW-421



SPANISH CEDAR

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-422



WHITE LIMBA WOOD

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-423



TIGER WOOD

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-425



DEEP CHARCOAL

THICKNESS
5 to 7.5 MM

IXPE
1 AND 1.5 MM

WEAR LAYER
0.3 AND 0.5 MM

SIZE
180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH
EMBOSSED MATT

INSTALLATION METHOD
UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-426



BUTTERNUT

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-428



MAPLE WOOD WHITE

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-429



SLATE GREY

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-430



GREYWOOD

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM

228.6 X 1219.2 MM

228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-431



DARK WALNUT

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-434



EBONY WOOD

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-435



OAK WOOD GREY

THICKNESS
5 to 7.5 MM

IXPE
1 AND 1.5 MM

WEAR LAYER
0.3 AND 0.5 MM

SIZE
180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH
EMBOSSED MATT

INSTALLATION METHOD
UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-436



ANTIQUÉ PINE

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSÉ MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-438



MAHOGANY WOOD

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM

228.6 X 1219.2 MM

228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-439



CARBON GREY

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM

228.6 X 1219.2 MM

228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-440



CARAMEL BROWN

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-441



CHESTNUT CHERRY

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-442



BRUNETTE WOOD

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-443



HONEY WOOD

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-444



COSMOS CARRARA

- THICKNESS
6MM
- IXPE
1 MM
- WEAR LAYER
0.5 MM
- SIZE
305 X 610 MM
- FINISH
EMBOSSSED MATT
- INSTALLATION METHOD
UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-445



NEUTRAL GREY

- THICKNESS
6MM
- IXPE
1 MM
- WEAR LAYER
0.5 MM
- SIZE
305 X 610 MM
- FINISH
EMBOSSED MATT
- INSTALLATION METHOD
UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-446



GLAMWOOD BEIGE

THICKNESS
5 to 7.5 MM

IXPE
1 AND 1.5 MM

WEAR LAYER
0.3 AND 0.5 MM

SIZE
180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH
EMBOSSED MATT

INSTALLATION METHOD
UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-458



ROMANO OAKWOOD

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-460



TIMELESS OAK

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM

228.6 X 1219.2 MM

228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



SCAN AND SEE THE
LIVE PHOTOS



QSW-471



CHERRY MERLOT

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



QSW-472



DRIFTWOOD HONEY

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM
228.6 X 1219.2 MM
228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



QSW-473



TUSCAN COFFEE

THICKNESS

5 to 7.5 MM

IXPE

1 AND 1.5 MM

WEAR LAYER

0.3 AND 0.5 MM

SIZE

180 X 1220 MM

228.6 X 1219.2 MM

228.6 X 1524 MM

FINISH

EMBOSSED MATT

INSTALLATION METHOD

UNILIN UNICLIC



TECHNICAL SPECIFICATION



Property	Test Method	Result
Dimensions	EN 427	1220*180mm
Thickness Over All	EN 428	3.0 mm, 4.0 mm, 5.0 mm, 7.0 mm
Thickness Wear Layer	EN 429	0.3 mm, 0.5 mm
Pell Strength of Layers	EN 431	Pass
Shear Forces of Layers	EN 432	Good
Residual Indentations	EN 433	Mean Value ≤ 0.1mm
Dimension Stability	EN 434	Shrinkage ≤ 0.12%/Curling ≤ 1.2mm
Resistance to Chemicals	EN 423	Class 0
Castot Chair Continuous	EN 425	No Disturbance/No Delamination
Light Fastness	ISO 105 B02	≥ 6
ASTM E84-03	NFPA Class B1	
Slip Resistance	DIN 51130	R9



Specification

SPC Core Thickness	4 And 6 MM
Wear Layer	0.3 And 0.5 MM
Plank Size	180 MM X 1220 MM
Padding	1mm IXPE black
Material	100% Virgin
Click Lock	Unilin Uniclic
5MM Warranty	5 Years For Residential & 3 Years For Commercial
7MM Warranty	10 Years For Residential & 7 Years For Commercial



MADELEINE
FLOORS

FLORIM DECORATIVES GLOBAL PVT. LTD.

GST:-24AAECF0397A1Z3

👤 Export sales inquiry

✉ neil@qsectiles.com

☎ 9429855970

👤 Domestic sales inquiry

✉ mayank@madeleinefloors.com

☎ 9429855974

🏠 OFFICE ADDRESS :-

📍 809-THE SPIRE, NEAR SHITAL PARK BRTS, 150 FEET RING ROAD, RAJKOT-360007,GUJARAT (INDIA).

🏠 FACTORY ADDRESS :-

📍 SURVEY NO.92/P5-P1, 93-P1/P2/P4/P5, VILLAGE HARIPAR, BESIDES SAHKAR COTTON,
TANKARA-LATIPER HIGHWAY,TANKARA-360110,GUJARAT (INDIA).

